


# AGRICULTURAL ROLLER CHAINS



ISO 487/DIN 8189/ASME B29.19M

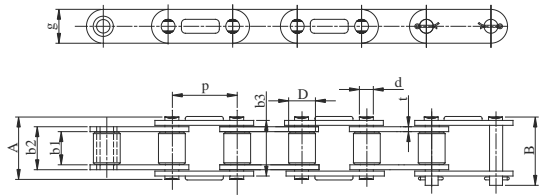

## AMERICAN STANDARD

Int'l. Ref. No.	Rombo Chain No.	Pitch P	Width between Inner Plates b1 (Min)	Roller Dia. D (Max)	Width over Inner Plates b2 (Max)	Width over Outer Plates b3 (Max)	Bearing Pin Dia. d (Max)	Width over Bearing Pin A (Max)	Width over Joint Fastener B (Max)	Link Plate Height g (Max)	Link Plate Thick t (Nom)	Bearing Area (sq.cm)	Average Weight per Metre (kg)	Tensile Strength	
														Min (N)	Avg (N)
CA2060**	U 38102	38.10	12.57	11.91	19.45	26.50	5.94	29.20	30.80	18.20	3.05	1.16	1.50	31300	37000
CA550**	U 4140A	41.40	19.81	16.87	25.70	31.70	7.19	35.60	38.20	19.20	2.60	1.87	1.85	40000	43500
CA555**	U 4140B	41.40	1270	16.87	19.20	26.20	7.19	28.70	32.15	19.20	2.90	1.37	1.65	40000	43500
CA557	U 4140C	41.40	19.05	17.75	25.85	32.90	7.92	36.00	39.00	22.20	3.15	1.87	2.37	51700	63700
CA620**	U 4201A	42.01	25.00	17.68	31.70	38.60	7.19	41.70	46.80	19.20	3.15	2.27	2.35	46000	57000
A550*	U 4140E	41.40	19.81	16.87	25.70	31.70	7.19	35.60	38.20	19.20	2.60	1.87	1.77	40000	43500
A557*	U 4140J	41.40	19.05	17.75	25.85	32.90	7.92	36.00	39.00	22.20	3.15	1.87	2.29	51700	63700
A620*	U 4201E	42.01	25.00	17.68	31.70	38.60	7.19	41.70	46.80	19.20	3.15	2.27	2.31	46000	57000

\* Eight Contour chain

\*\* Bush chain also available

Note : embossed outer plate only for maize chain



INNER LINK



OUTER LINK



CONNECTING LINK SECURED WITH SPLIT PIN



CONNECTING LINK SECURED WITH WIRE



OFFSET LINK SECURED WITH SPLIT PIN



OFFSET LINK SECURED WITH WIRE

Above spares are available for all models