



HIGH PERFORMANCE CHAINS SUPER TOUGH,

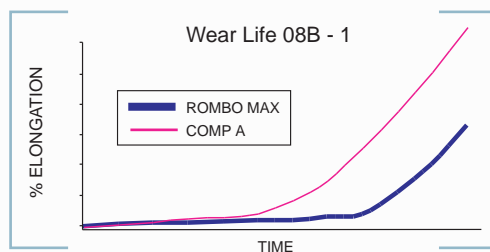

these Rombo Max chains have been specifically developed for client applications that require exceptional strength and endurance. What makes them tougher than the rest? Inspiration in the detail of the plates, pins, bushes and rollers, manufacture to close tolerance and assembly with care.

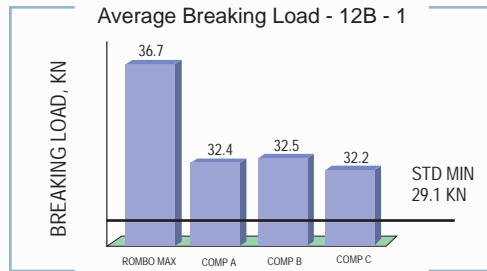

| ISO No. | Rombo Max No. | Pitch | Width between Inner Plates (Min.) | Roller Dia. (Max.) | Plate Height (Max.) | Width Over Bearing Pin (Max.) | Bearing Pin Dia. (Max.) | Rombo Max Tensile Strength (KN) (Min.) | Rombo Max Tensile Strength (KN) (Avg.) | Rombo Max Allowable Load (KN) (Max.) |
|---------|---------------|--------|-----------------------------------|--------------------|---------------------|-------------------------------|-------------------------|--|--|--------------------------------------|
| 08B-1 | Q 083 01 | 12.70 | 7.75 | 8.51 | 11.81 | 17.00 | 4.45 | 20.79 | 22.66 | 4.5 |
| 10B-1 | Q 101 01 | 15.875 | 9.65 | 10.16 | 14.73 | 21.80 | 5.08 | 27.65 | 29.87 | 5.6 |
| 12B-1 | Q 120 01 | 19.05 | 11.68 | 12.07 | 16.13 | 22.70 | 5.72 | 33.34 | 36.69 | 7.25 |
| 16B-1 | Q 160 01 | 25.40 | 17.02 | 15.88 | 21.08 | 36.10 | 8.27 | 73.55 | 78.48 | 15 |
| 20B-1 | Q 200 01 | 31.75 | 19.56 | 19.05 | 26.42 | 43.20 | 10.19 | 110.82 | 116.74 | 23.75 |

Note: models also available in double and triple strands.

HIGH PERFORMANCE