



SINTERED BUSH CHAINS SELF LUBRICATING

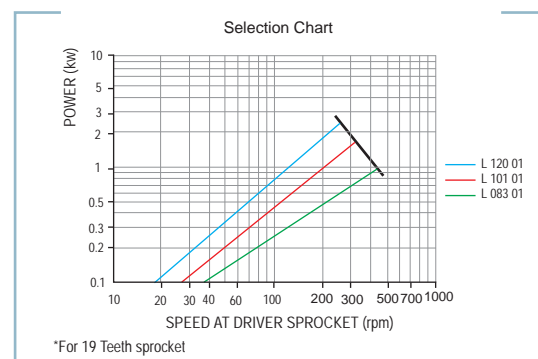

chains for clean environment applications where greasing is often not possible: like food processing, printing, pharmaceuticals and electronics. It features unique powder alloy steel bushes that are impregnated with a special oil. To deliver a maintenance-free wear life up to two times in excess of standard chains.

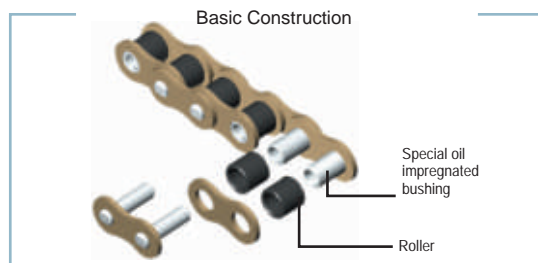

ISO No.	Rombo Max No.	Pitch	Width between Inner Plates (Min.)	Roller Dia. (Max.)	Plate Height (Max.)	Width Over Bearing Pin (Max.)	Bearing Pin Dia. (Max.)	Rombo Max Tensile Strength (KN) (Min.)	Rombo Max Tensile Strength (KN) (Avg.)
08B-1	L083 01	12.70	7.75	8.51	12.40	17.00	4.45	18.0	21.06
10B-1	L101 01	15.875	9.65	10.16	14.70	19.60	5.08	22.4	27.55
12B-1	L120 01	19.05	11.68	12.07	16.10	22.70	5.72	29.0	32.48

SINTERED BUSH CHAINS