




MOTORCYCLE DRIVE CHAINS



MOTORCYCLE DRIVE CHAINS

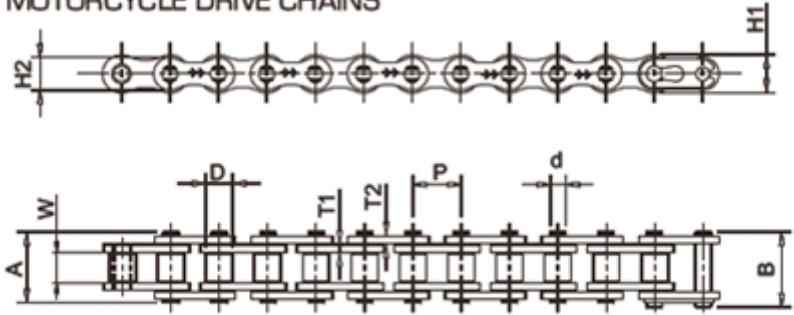

Rombo Motorcycle drive chains are precision engineered to offer excellent performance in terms of low wear and long life.

Intl Ref. No.	ROMBO Chain No.	Pitch (P)	Width between Inner Plates (W) (Min)	Roller Diameter (D) (Max)	Plate Height		Plate Thickness		Bearing Pin Diameter (D) (Max)	Width Over Bearing Pin (A) (Max)	Width Over Joint Fasteners (B) (Max)	Average Weight Per Metre (Kg)	Tensile Strength KN (Min)
					IP (H1) (Max)	OP (H2) (Max)	IP (T1) (Max)	OP (T2) (Max)					
J415	D 087 01	12.70	5.15	7.75	10.57	10.57	1.37	1.37	4.07	13.16	14.30	0.476	142.76
J415H	D 08K 01	12.70	5.01	7.75	10.57	10.57	1.76	1.50	4.07	14.05	15.20	0.554	163.15
J415R	D 08M 01	12.70	5.01	7.75	9.90	9.00	1.76	1.58	4.07	14.30	15.40	0.500	163.15
J420	D 088 01	12.70	6.35	7.77	11.56	10.57	1.50	1.50	3.96	14.80	16.40	0.583	163.15
J428	D 089 01	12.70	7.95	8.51	11.56	10.57	1.58	1.50	4.47	16.80	19.00	0.693	193.75
J428H	D 08E 01	12.70	7.85	8.51	11.75	10.20	2.00	2.00	4.46	18.90	21.05	0.848	214.14
J520	D 105 01	15.875	6.35	10.16	14.48	13.51	2.00	2.00	5.07	17.44	18.90	0.944	275.32
J525	D 104 01	15.875	7.94	10.16	14.48	13.51	2.00	2.00	5.07	18.95	20.40	1.007	275.32
J530	D 102 01	15.875	9.40	10.16	14.48	13.51	2.00	2.00	5.07	21.80	24.30	1.055	275.32
J520M	D 105 A2	15.875	6.35	10.16	15.00	12.92	2.00	2.00	5.25	17.44	18.90	1.025	305.91

WORK STANDARD DRIVE CHAINS

ROMBO Chain No.	Pitch (P)	Width between Inner Plates (W) (Min)	Roller Diameter (D) (Max)	Plate Height		Plate Thickness		Bearing Pin Diameter (D) (Max)	Width Over Bearing Pin (A) (Max)	Width Over Joint Fasteners (B) (Max)	Average Weight Per Metre (Kg)	Tensile Strength KN (Min)
				IP (H1) (Max)	OP (H2) (Max)	IP (T1) (Max)	OP (T2) (Max)					
D 084 01	12.70	4.88	7.75	10.20	9.10	1.25	1.20	4.07	12.35	13.85	0.630	124.92
D 086 01	12.70	2.38	7.75	9.86	8.18	1.00	1.00	3.62	8.20	-	1.265	83.62
D 08C 01	12.70	3.30	7.75	9.47	8.18	1.00	1.00	3.62	10.20	11.70	0.289	83.62
D 08D 01	12.70	6.25	7.77	9.47	8.18	1.25	1.25	3.58	14.80	18.70	0.437	92.79
D 08F 01	12.70	7.77	4.80	11.56	10.57	1.50	1.50	3.96	13.45	15.15	0.578	143.78
D 08L 01	12.70	5.15	7.75	9.90	9.00	1.50	1.37	4.07	13.16	14.30	0.450	142.76
D 08N 01	12.70	7.95	8.50	11.75	10.20	1.76	1.76	4.50	17.70	18.95	0.760	214.14
D 08P 01	12.70	5.15	7.68	11.56	10.57	1.00	1.00	4.07	12.10	13.00	0.717	95.85
D 08Q 01	12.70	7.95	8.50	11.56	10.57	1.76	1.76	5.00	17.70	18.95	0.784	214.14
D 08R 01	12.70	7.95	8.51	12.00	10.80	1.75	1.75	4.50	17.70	18.95	0.794	214.14
D 08S 01	12.70	7.95	8.50	11.56	10.57	1.58	1.50	5.00	16.72	19.05	0.723	193.75
D 08T 01	12.70	7.85	8.51	11.75	10.20	2.00	2.00	5.00	18.90	21.05	0.845	214.14
S 08M 01	12.70	5.01	7.75	10.57	10.57	1.50	1.50	4.44	14.00	15.00	0.750	163.15

B 103 01	15.875	11.40	10.08*	16.58	16.58	2.44	2.85	7.00	31.15	31.85	2.087	479.27
B 104 01	15.875	7.95	10.16*	14.48	-	2.00	2.00	5.07	18.90	20.35	2.510	275.32
D 101 01	15.875	9.65	10.16	14.48	13.51	1.58	1.58	5.07	19.60	23.70	0.921	233.52
D 105 A1	15.875	6.35	10.16	15.00	13.00	2.00	2.00	5.20	17.95	19.40	1.011	295.72

* Bush Chains

TIDC India e-mail : exports@tidc.murugappa.com