




'O' RING CHAINS

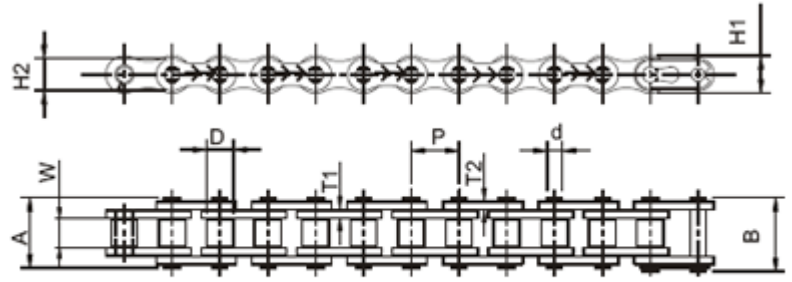

Rombo 'O' ring chains with unique design are engineered to offer superior resistance to wear.

AUTOMOTIVE 'O' RING CHAINS

Intl Ref. No.	ROMBO Chain No.	Pitch (P)	Width between Inner Plates (W) (Min)	Roller Diameter (D) (Max)	IP Height (H1) (Max)	OP Height (H2) (Max)	IP Thickness (T1) (Max)	OP Thickness (T2) (Max)	Width Over Bearing Pin (A) (Max)	Bearing Pin Diameter (d) (Max)	Width Over Joint Fasteners (B) (Max)	Average Weight Per Metre (Kg)	Tensile Strength KN (Min)
J415 OR	D 087 01	12.70	5.15	7.75	10.57	10.57	1.37	1.37	15.10	4.07	16.24	0.476	142.76
J428 OR	D 089 01	12.70	7.95	8.51	11.56	10.57	1.58	1.50	19.00	4.50	20.30	0.693	188.65
J520 OR	D 105 01	15.875	6.35	10.16	14.48	13.51	2.00	2.00	20.57	5.07	22.04	0.944	273.28

OTHER 'O' RING CHAINS

Intl Ref. No.	ROMBO Chain No.	Pitch (P)	Width between Inner Plates (W) (Min)	Roller Diameter (D) (Max)	IP Height (H1) (Max)	OP Height (H2) (Max)	IP Thickness (T1) (Max)	OP Thickness (T2) (Max)	Width Over Bearing Pin (A) (Max)	Bearing Pin Diameter (d) (Max)	Width Over Joint Fasteners (B) (Max)	Average Weight Per Metre (Kg)	Tensile Strength KN (Min)
08B OR	D 083 01	12.70	7.75	8.51	11.56	10.57	1.58	1.50	19.00	4.45	20.30	0.693	185.59
10B OR	D 101 01	15.875	9.65	10.16	14.48	13.51	1.58	1.58	21.94	5.06	23.53	0.921	231.48

* Double Pitch Zinc Plated Chains

TIDC India e-mail : exports@tidc.murugappa.com