




EUROPEAN SERIES (BS) - SOLID PIN CHAINS



EUROPEAN SERIES (BS) - SOLID PIN CHAINS

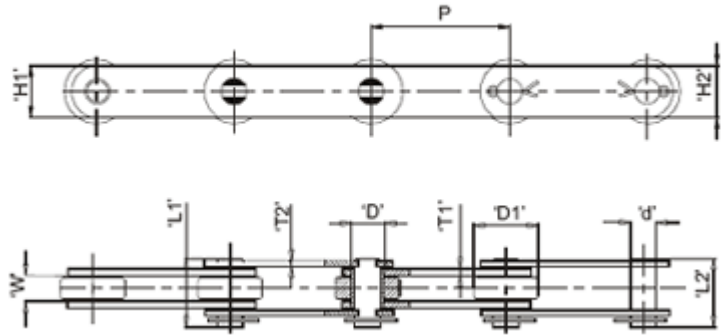

Minimum tensile Strength in lbs	Pitch ('P')		Width between Inner Plates (W) (Min)	Large roller Dia ('D1')	Bush Dia ('D')	Solid pin Dia ('d')	Solid pin length ('L1') (Max)	Connecting pin length ('L2') (Max)	Inner Plate		Outer Plate		Avg. Wt/Mtr in (Kg)
	INCH	METRIC							Height ('H1')	Thick ('T1')	Height ('H2')	Thick ('T2')	
7500	2.0	50.80	15.00	31.80	18.00	14.00	38.00	42.60	25.40	3.80	25.40	3.80	4.07
	2.5	63.50											3.59
	3.0	76.20											3.29
	4.0	101.60											2.88
	5.0	127.00											2.65
	6.0	152.40											2.49
15000	2.0	50.80	19.00	47.60	23.60	19.00	46.00	49.80	38.10	5.10	38.10	3.80	8.14
	3.0	76.20											7.77
	4.0	101.60											6.56
	5.0	127.00											5.85
	6.0	152.40											5.34
	7.0	152.40											5.00
	8.0	203.20											4.78
	9.0	228.60											4.53
30000	4.0	101.60	25.40	66.67	33.20	26.90	60.00	65.40	51.00	7.10	51.00	5.10	14.50
	5.0	127.00											12.65
	6.0	152.40											11.40
	7.0	177.80											10.52
	8.0	203.20											9.87
	9.0	228.60											9.34
45000	5.0	127.00	38.10	88.90	38.10	31.80	82.00	88.20	61.00	8.90	61.00	7.60	24.69
	6.0	152.40											24.69
	7.0	177.80											22.31
	8.0	203.20											20.55
	9.0	228.60											19.21
	12.0	304.80											16.49
60000	6.0	152.40	38.10	88.90	38.10	23.00	82.00	86.90	61.00	8.90	61.00	7.60	23.73
	7.0	177.80											21.96
	8.0	203.20											20.26

	9.0	228.60											18.94
	12.0	304.80											16.28
90000	6.0	152.40	38.10	88.90	38.10	29.40	94.00	98.60	63.50	13.00	63.50	10.00	29.61
	9.0	228.60											23.78
	12.0	304.80											20.87

Note : Connecting links & clevis pins are also available

TIDC India e-mail : exports@tidc.murugappa.com