


AGRICULTURAL ROLLER CHAINS

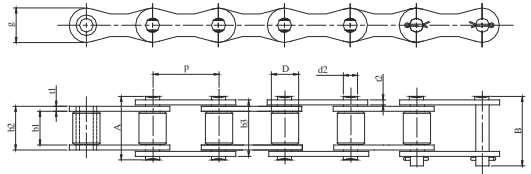


INDUSTRY STANDARD

CURVED PLATES


Intl. Ref. No.	Rombo Chain No.	Pitch P	Width between Inner Plates b1 (Min)	Roller Dia. D (Max)	Width over Inner Plates b2 (Max)	Width over Outer Plates b3 (Max)	Bearing Pin Dia. d (Max)	Width over Bearing Pin A (Max)	Width over Joint Fastener B (Max)	Link Plate Height g (Max)	Plate Thickness		Bearing Area (sq.cm)	Average Weight per Metre (kg)	Tensile Strength	
											t1 (Nom)	t2 (Nom)			Min (N)	Avg (N)
S32H	U 29212	29.21	15.88	11.43	20.19	24.30	5.08	26.80	28.60	13.20	2.00	2.00	1.03	0.88	8000	24800
P30-3	U 30003	30.0	17.02	15.88	25.40	32.00	8.27	35.60	39.35	20.70	3.60	2.90	2.10	2.53	44000	61000
S52L	U 38103	38.10	16.00	15.24	21.90	27.90	5.72	30.50	33.20	17.20	2.60	2.60	1.20	1.24	29840	30900
S52LV	U 38104	38.10	18.00	15.88	24.40	30.60	6.93	33.80	37.00	17.20	2.90	2.90	1.70	1.46	30000	33000
S55R	U 4140R	41.40	22.23	17.78	28.50	34.50	5.72	37.50	39.80	21.20	2.60	2.60	2.40	2.40	18000	37000
S55V	U 4140A	41.40	22.23	17.90	28.70	35.30	8.27	39.40	41.70	20.70	2.90	2.90	2.40	1.92	40000	53000
S55VH	U 4140VH	41.40	22.23	17.70	28.70	35.30	8.27	39.40	41.70	21.60	2.90	2.90	2.40	2.10	41200	55000
P41.30	U 41406	41.40	22.23	15.88	28.70	35.30	8.27	39.40	41.70	20.60	2.90	2.90	2.40	1.85	40000	53000
S55SK8H	U 41409	41.40	20.50	15.88	27.00	33.70	7.97	37.00	40.10	20.00	2.90	2.90	2.15	1.75	42500	54000
P41.40-3	U 4140P	41.40	2.00	15.88	28.55	35.45	8.27	39.40	41.70	20.70	4.00	2.90	2.40	2.05	60000	63000
P40.60	U 40601	40.60	22.00	14.00	27.30	32.70	6.93	36.30	40.30	19.20	2.40	2.40	1.75	1.55	33060	35300
A557W	U 4140W	41.40	19.05	17.75	25.85	32.90	7.91	36.00	39.70	22.30	3.15	3.15	1.87	2.35	72000	74000




INNER LINK





OUTER LINK




CONNECTING LINK SECURED WITH SPLIT PIN



CONNECTING LINK SECURED WITH WIRE



OFFSET LINK SECURED WITH SPLIT PIN



OFFSET LINK SECURED WITH WIRE

Above spares are available for all models