


AGRICULTURAL ROLLER CHAINS

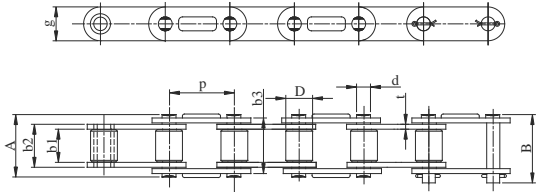

INDUSTRY STANDARD

STRAIGHT PLATES

Intl. Ref. No.	Rombo Chain No.	Pitch P	Width between Inner Plates b1 (Min)	Roller Dia. D (Max)	Width over Inner Plates b2 (Max)	Width over Outer Plates b3 (Max)	Bearing Pin Dia. d (Max)	Width over Bearing Pin A (Max)	Width over Joint Fastener B (Max)	Plate Height g (Max)	Plate Thickness		Bearing Area (sq.cm)	Average Weight per Metre (kg)	Tensile Strength	
											t1 (Nom)	t2 (Nom)			Min (N)	Avg (N)
38.4R	38401	38.40	19.05	15.88	24.20	29.60	6.93	32.80	36.50	17.20	2.40	2.40	1.70	1.63	33060	34300
38.4R-1	38405	38.40	19.05	14.00	24.20	29.60	6.93	32.80	36.50	17.20	2.40	2.40	1.70	1.58	33060	34300
38.4V	38402	38.40	18.00	15.88	25.40	32.00	6.93	34.95	38.80	17.20	2.90	2.90	1.70	1.73	40000	42500
38.4V-LR	38402 LR	38.40	18.00	21.00	25.40	32.00	6.93	34.95	38.80	17.20	2.90	2.90	1.70	2.05	40000	42500
38.4VB*	38403	38.40	19.05	15.88	25.45	32.00	8.27	35.60	38.80	20.20	2.90	2.90	2.10	2.10	50000	50500
38.4VB-1	U38403.00.01	38.40	19.05	15.88	26.30	33.60	8.27	36.50	40.20	20.20	3.25	3.25	1.85	2.23	54000	50500
CA550-LR	U 4140A LR	41.40	19.81	20.00	25.70	31.70	7.19	35.60	38.20	19.20	2.60	2.60	1.87	2.15	40000	43500
CA2062H	U 38102.02	38.10	12.57	22.23	19.45	26.60	5.96	30.36	32.10	18.20	3.15	3.15	1.16	1.78	31290	37000
CA627*	U 30001	30.00	19.02	15.88	25.45	32.00	8.27	35.60	38.80	20.70	2.90	2.90	2.10	2.45	44141	53000
P30-2	U 30002	30.00	17.02	15.88	25.45	32.00	8.27	35.60	38.80	20.70	3.60	2.90	2.10	2.75	44140	61000
P40-1	U 40001	41.40	17.02	15.88	25.45	32.00	8.27	35.60	38.80	20.20	3.60	2.90	2.10	2.10	50000	62000
S55VD	U 41403	41.40	22.23	17.90	28.80	35.40	8.27	39.40	42.10	20.20	2.90	2.90	2.40	2.27	44140	52200
S55H*	U 41405	41.40	22.23	17.90	29.00	35.50	9.10	39.40	42.10	23.20	2.90	2.90	2.64	2.60	49000	59000
S55SK2	U 41407	41.40	22.23	15.88	31.00	37.90	8.27	41.40	44.50	20.20	4.00	2.90	2.72	2.67	40000	54000
S55SK7	U 41408	41.40	22.23	22.86	31.00	37.90	8.27	41.40	44.50	20.20	4.00	2.90	2.72	3.53	40000	54000
CA550H*	U 4140H	41.40	19.05	16.87	25.45	32.00	8.27	35.80	38.80	20.20	2.90	2.90	2.10	2.15	55000	60000
CA550V	U 4140V	41.40	20.00	16.87	26.60	33.40	7.19	36.00	39.80	19.20	2.90	2.90	1.92	2.25	57870	59000
P41.40-1	U 4140G	41.40	20.50	15.88	27.00	33.70	9.10	37.00	40.10	23.25	2.90	2.90	2.64	1.95	49040	57000
P41.40-2	U 4140F	41.40	20.00	15.88	28.55	35.40	8.27	38.70	44.60	20.20	4.00	2.90	2.40	2.25	52970	54000
P40-3	U 40003	40.00	16.00	12.00	23.00	29.60	6.00	32.10	34.20	17.00	2.90	2.90	1.20	1.40	40200	44000
P52-1	U 52001	52.00	20.00	17.00	26.30	33.00	9.53	37.10	40.65	26.20	2.90	2.90	2.62	2.36	70300	72700

* Bush chain also available

Note: embossed outer plate only for maize chains



INNER LINK



OUTER LINK



CONNECTING LINK SECURED WITH SPLIT PIN



CONNECTING LINK SECURED WITH WIRE



OFFSET LINK SECURED WITH SPLIT PIN



OFFSET LINK SECURED WITH WIRE

Above spares are available for all models